



Sample gas probe GAS 222.21 Ex2

In many applications gas analysis is key for safe and efficient control of process flows, environmental protection and quality assurance. In extractive gas analysis the location of the gas sampling point is crucial for the reproducibility and accuracy of the analysis results.

The specific filter capacity, corrosion resistance and functional equipment requirements for the probe arise from the composition of the sample gas.

However, operating costs are also an important criterion in the selection, as the sampling points are frequently located at hard to access points in the system. Effective particle filter backwashing options and low maintenance characterise the extensive GAS probe series.

Versions with Atex and IECEx approval

Heated probe with shut-off valve, inlet and/or outlet filter and weather hood

The outlet filter can easily be removed by turning the handle 90°

The probe body and the area around the screw connection for the heated sample gas line are completely isolated


Heater self-regulating to approx. 120 °C (T3)/70 °C (T4) with low temperature alarm

For dust loads up to 2 g/m³ with outlet filter or > 10 g/m³ with inlet filter

This probe is suitable for use in explosive areas



Flow chart

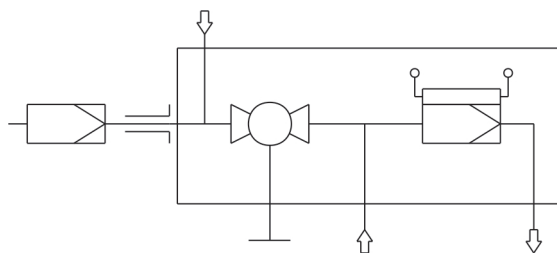

Technical Data

Gas Probe Technical Data

Ambient temperature without accessories:	-20 to +80 °C	
Ambient temperature with accessories:	Component	Ambient temperature range
	Compressed air valve:	-30 °C < T _{amb} < +60 °C
	Solenoid valve for pneumatic drive:	-10 °C < T _{amb} < +55 °C
	Pneumatic drive:	-20 °C < T _{amb} < +60 °C
	Limit switch:	-25 °C < T _{amb} < +60 °C
Max. gas inlet temperature:	+195 °C (T3)/+130 °C (T4)	
Medium temperature (blowback):	Component	Medium temperature range
	Compressed air valve:	-10 °C to +80 °C
	Solenoid valve for pneumatic drive:	-10 °C to +100 °C
Self-regulating heater:	+120 °C (T3)/+70 °C (T4)	
Low temperature alarm:	Contact switches over at < 95 °C (T3) or < 50 °C (T4); simple electrical equipment per EN 60079-11; U _i 30 V, I _i = 100 mA; C _i /L _i ~0	
Electrical data:	230 V, 2.0 A, 50/60 Hz 115 V, 3.8 A, 50/60 Hz	
Max. operating pressure:	6 bar	
Material:	1.4571; ball valve 1.4408	
Parts in contact with media:	Seals: PTFE/graphite/1.4404 and see filter	
Markings:	ATEX: II 3G Ex ec ic mb ¹ IIC T3/T4 Gc IECEX: Ex ec ic mb ¹ IIC T3/T4 Gc	

¹ Only for versions with solenoid valve

Ordering instructions

The item number is a code for the configuration of your unit. Please use the following model key:


4622221	X	0	X	X	X	X	3	X	X	X	X	X	X	X	X	Product Characteristics
																Terminal box
		0														No
		1														Yes
																Flange
		0	1													Flange DN65 PN6
		0	2													Flange DN3"-150
																Explosive areas outdoor and indoor use
				2	9											Ex-Zone 2 outdoors, none indoors
				2	2											Ex-Zone 2 outdoor and indoor use
																Temperature class
						3										T3
						4										T4
																Low temperature alarm
							1									NC contact
							2									NO contact
																Calibrating gas connection
							0									No
							1									6 mm
							2									6 mm with check valve
							3									1/4"
							4									1/4" with check valve
																Compressed air tank
							0									No
							1									Yes (not for Zone 2 indoor use)
																Compressed air valve
							0									Ball valve
							1									Solenoid valve 115 V
							2									Solenoid valve 230 V
							3									Solenoid valve 24 V
							9									none
																Pneumatic drive for built-in ball valve
							0									No
							1									Monostable pressure-free opened
							2									Monostable pressure-free closed
																Limit switch for pneumatic drive
							0									No
							1									Yes
																Solenoid valve for pneumatic drive
							0									No
							1									Yes

Options

The base unit becomes functional by adding accessories suitable for the application. Please refer to accessory data sheet no. 461099 for information.

Please also refer to data sheet no. 461000 "GAS 222 Gas Probes" for a general description.

Dimensions

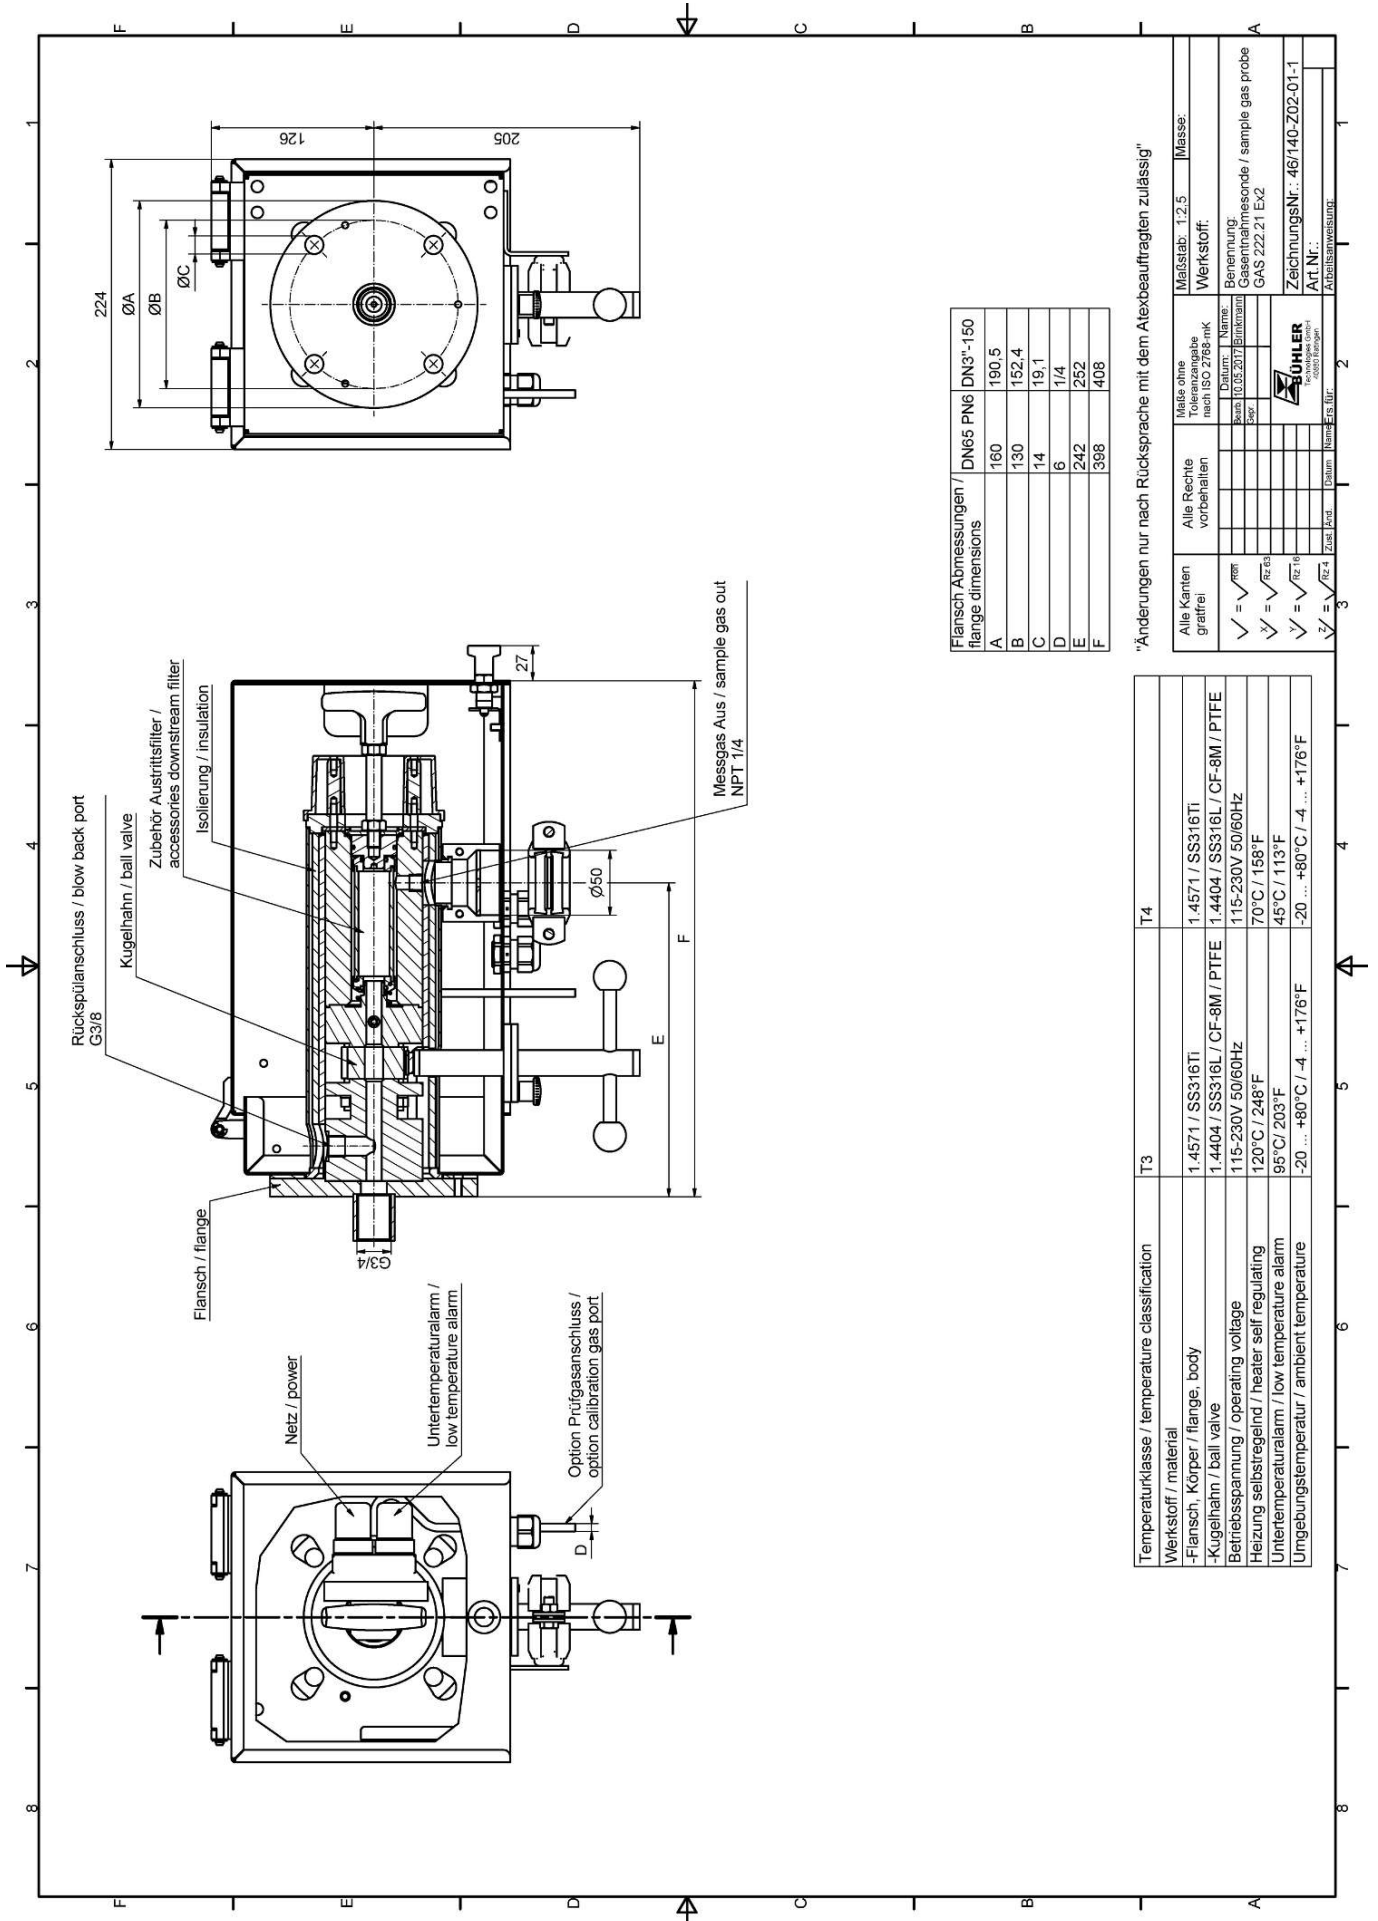


Flansch Abmessungen / flange dimensions	DN65 PN6	DN3"-150
A	160	190,5
B	130	152,4
C	14	19,1
D	6	1/4
E	242	252
F	398	408

Änderungen nur nach Rücksprache mit dem Atexbeauftragten zulässig

Temperaturklasse / temperature classification	T3	T4
Werkstoff / material	1.4571 / SS316TI	1.4571 / SS316TI
Flansch, Körper / flange, body	1.4404 / SS316L / CF-8M / PTFE	1.4404 / SS316L / CF-8M / PTFE
Kugelhahn / ball valve	115-230V 50/60Hz	115-230V 50/60Hz
Betriebsspannung / operating voltage	120°C / 248°F	70°C / 158°F
Heizung selbstregelnd / heater self regulating	95°C / 203°F	45°C / 113°F
Untertemperaturalarm / low temperature alarm	-20 ... +80°C / -4 ... +176°F	-20 ... +80°C / -4 ... +176°F
Umgebungstemperatur / ambient temperature		

Alle Kanten gratfrei	Alle Rechte vorbehalten	Masse ohne Verpackung nach ISO 2768-mK	Maßstab: 1:2.5	Masse:
✓ = √R0.4			Werkstoff:	
✓ = √R0.63			Benennung:	
✓ = √R0.8			Gesamtabmessungen / sample gas probe	
✓ = √R1.6			GAS 222.21 Ex2	
✓ = √R2.5			Zerchungs-Nr.: 46/140-Z02-01-1	
			Art.Nr.:	
			Abteilungsbezeichnung:	

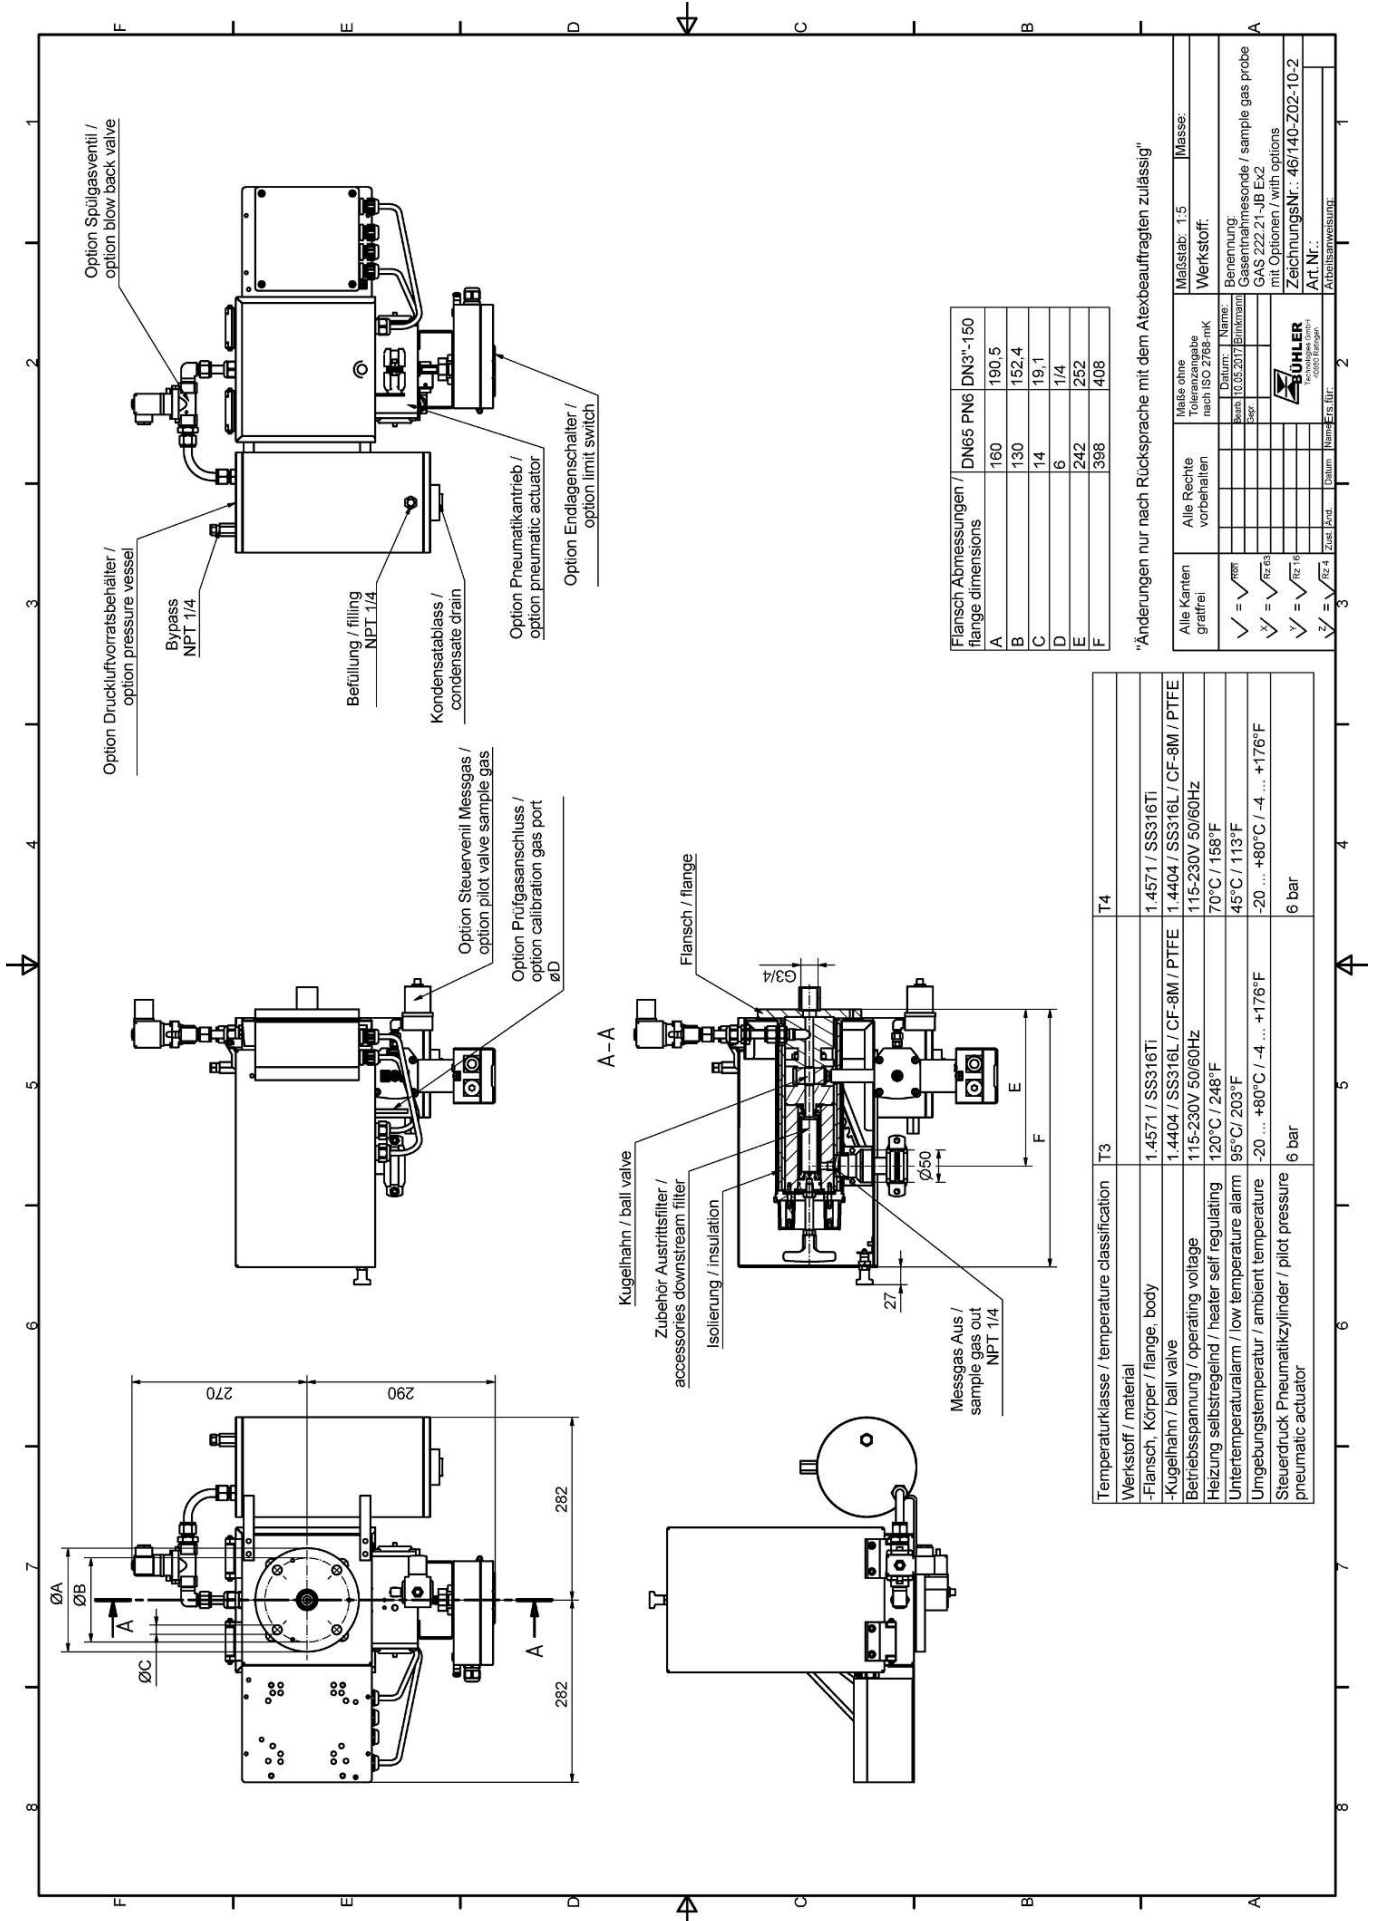

Flansch Abmessungen / flange dimensions	DN65 PN6	DN3"-150
A	180	190,5
B	130	152,4
C	14	19,1
D	6	1/4
E	242	252
F	398	408

Änderungen nur nach Rücksprache mit dem Atexbeauftragten zulässig

Temperaturklasse / temperature classification	T3	T4
Werkstoff / material	1.4571 / SS316Ti	1.4571 / SS316Ti
Flansch, Körper / flange, body	1.4404 / SS316L / CF-8M / PTFE	1.4404 / SS316L / CF-8M / PTFE
Kugelhahn / ball valve	115-230V 50/60Hz	115-230V 50/60Hz
Betriebsspannung / operating voltage	120°C / 248°F	70°C / 158°F
Heizung selbstregelnd / heater self regulating	95°C / 203°F	45°C / 113°F
Untertemperaturalarm / low temperature alarm	-20 ... +80°C / -4 ... +176°F	-20 ... +80°C / -4 ... +176°F
Umgebungstemperatur / ambient temperature	6 bar	6 bar
Steuerdruck Pneumatikzylinder / pilot pressure pneumatic actuator		

Alle Rechte vorbehalten	Maßstab: 1:5	Masse:
Alle Kanten gratfrei	Mitte ohne Toleranzangabe nach ISO 2768 mK	Werkstoff:
✓ = ✓ ^{min}	Datum: 10.05.2017	Benennung: Gasinfrarotmessende / sample gas probe GAS 222.21-Ex2
✓ = ✓ ^{max}	Zeichnung: 461740-Z02-10-2	mit Optionen / with options
✓ = ✓ ^{RE 16}	Art.Nr.:	Arbeitsweise:
✓ = ✓ ^{RE 4}	Arbeitsweise:	
	Zust. / cad.	Datum
	3	2
	Name	Frh. / für: